

Rope tensioning clamp

Product information



General: For safe and careful installation, tensioning or pulling of ropes. The tension spring construction allows to position the clip on the rope without any additional fixing and maintains the grip on the rope even if the rope is unloaded.

Nominal size: 4-10 with round hole

Nominal size: 16-38 with oval hole


Features:

- Hardened clamping shoes.
- Clamping shoes with deep and sharp teeth.
- Tension spring for easy positioning.

Finish: Electro galvanized. Shoes browned.

Note: Before every use the clamping shoes and rope should be cleaned. Please take care that no grease or oil is on the connection.

Warning: Not to be used for lifting.

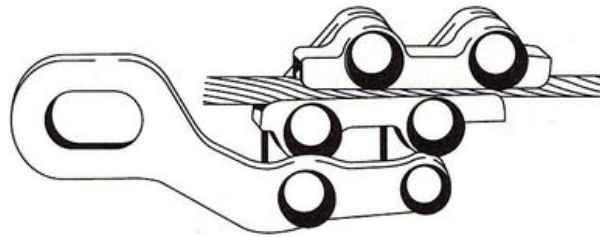

| Part Code | Rope Ø range mm | Type | W mm | Rope cross section mm² | B mm | C mm | D mm | h closed | h open | h opening | l mm | Weight kg | Delivery time |
|-----------|-----------------|-------|------|------------------------|------|------|------|----------|--------|-----------|------|-----------|---------------|
| 161688 | 1-4 | RTC4 | 19 | 1 - 16 | 36 | 15 | 19 | 47 | 51 | 6,5 | 124 | 0.25 | 15 |
| 142845 | 3-8 | RTC8 | 20 | 6 - 35 | 47 | 21 | 20 | 76 | 82 | 10,0 | 169 | 0.85 | 15 |
| 161799 | 5-10 | RTC10 | 18 | 16 - 70 | 44 | 24 | 18 | 80 | 88 | 12,0 | 195 | 1.1 | 15 |
| 158252 | 6-18 | RTC16 | 39 | 50 - 150 | 54 | 25 | 30 | 83 | 97 | 19,0 | 245 | 1.8 | 15 |
| 107583 | 10-28 | RTC26 | 38 | 95 - 400 | 62 | 31 | 29 | 107 | 130 | 26,0 | 265 | 3.5 | 15 |
| 161258 | 20-38 | RTC38 | 38 | 240 - 800 | 62 | 36 | 29 | 126 | 153 | 40,0 | 286 | 6.5 | 15 |

Blueprint

