
Lifting Solutions Group
Axel Johnson International

SS 6x19-FC


Product information



Slings

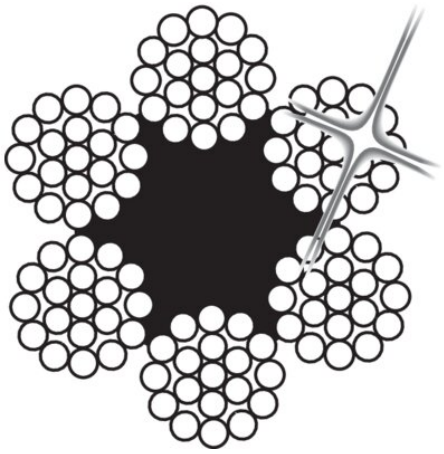

Overhead cranes



Typical applications: Cranes, hoist blocks, lifts, wire rope slings.

... *Read more*

Material: AISI 316.
Marking: According to standard
Standard: EN 12385-4

Fill factor: 0.45

Traction Levage
marketingtl@traclev.com

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

SS 6x19-FC

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
108100304620128	3	1,570	Stainless	sZ	4.34	3.21	No-Lube	3.1
108100404620128	4	1,570	Stainless	sZ	7.71	5.71	No-Lube	5.5
108100504620128	5	1,570	Stainless	sZ	12	8.93	No-Lube	8.7
108100604620128	6	1,570	Stainless	sZ	17.4	12.9	No-Lube	13
108100704620128	7	1,570	Stainless	sZ	23.6	17.5	No-Lube	17
108100804620128	8	1,570	Stainless	sZ	30.8	22.8	No-Lube	22
108100904620128	9	1,570	Stainless	sZ	39	28.9	No-Lube	28
108101004620128	10	1,570	Stainless	sZ	48.2	35.7	No-Lube	35
108101204620128	12	1,570	Stainless	sZ	69.4	51.4	No-Lube	50

Traction Levage
marketingtl@traclev.com
© November 2026 - All Rights Reserved