


## SS 6x36WS-FC

---

### Product information

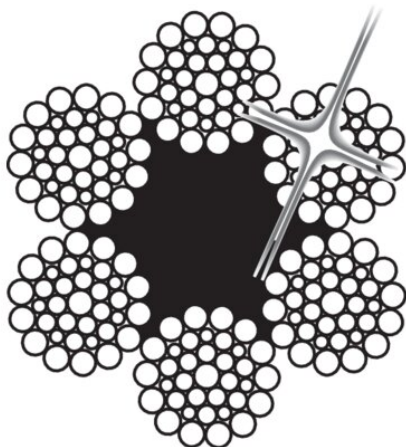

**Typical applications:** Cranes, hoist blocks, lifts, wire rope slings.

**Design:** Ordinary right hand lay.

[... Read more](#)

---

**Rope construction:** 6x36WS-FC Warrington-Seale.

**Material:** AISI 316.

**Fill factor:** 0,50

## SS 6x36WS-FC

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
108100804620168	8	1,570	Stainless	sZ	33	25.2	No-Lube	24
108101004620168	10	1,570	Stainless	sZ	51.6	39.3	No-Lube	37
108101204620168	12	1,570	Stainless	sZ	74.4	56.6	No-Lube	53
108101404620168	14	1,570	Stainless	sZ	101	77	No-Lube	73
108101604620168	16	1,570	Stainless	sZ	133	100	No-Lube	95
108101804620168	18	1,570	Stainless	sZ	168	127	No-Lube	120
108102004620168	20	1,570	Stainless	sZ	203	157	No-Lube	148
108102204620168	22	1,570	Stainless	sZ	250	190	No-Lube	179
108102404620168	24	1,570	Stainless	sZ	298	226	No-Lube	214
108102604620168	26	1,570	Stainless	sZ	340	266	No-Lube	251
108102804620168	28	1,570	Stainless	sZ	405	308	No-Lube	291
108103004620168	30	1,570	Stainless	sZ	464	353	No-Lube	334