


## Wire Rope Sling - With Hook and Masterlink

### Product information

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

... [Read more](#)

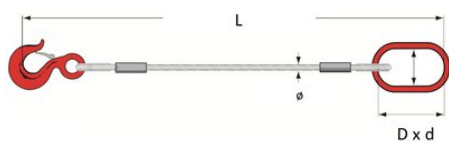

**Marking:** According to standard  
**Standard:** EN 13414-1

**Safety factor:** 5:1

## Wire Rope Sling - With Hook and Masterlink

### Technical data

| Part code | Rope diameter<br>mm | WLL<br>ton | Masterlink | Hook opening<br>mm |
|-----------|---------------------|------------|------------|--------------------|
| 1603      | 7                   | 0.5        | 100 X 60   | 22.6               |
| 1603      | 8                   | 0.65       | 100 X 60   | 22.6               |
| 1603      | 9                   | 0.8        | 100 X 60   | 22.6               |
| 1603      | 10                  | 1          | 100 X 60   | 22.6               |
| 1603      | 11                  | 1.2        | 100 X 60   | 23.1               |
| 1603      | 12                  | 1.4        | 100 X 60   | 23.1               |
| 1603      | 13                  | 1.8        | 100 X 60   | 25.4               |
| 1603      | 14                  | 2.12       | 120 X 70   | 27.7               |
| 1603      | 16                  | 2.7        | 120 X 70   | 27.7               |
| 1603      | 18                  | 3.4        | 135 X 75   | 34.5               |
| 1603      | 20                  | 4.35       | 135 X 75   | 34.5               |
| 1603      | 22                  | 5.2        | 135 X 75   | 40.9               |
| 1603      | 24                  | 6.3        | 150 X 90   | 40.9               |
| 1603      | 26                  | 7.2        | 150 X 90   | 40.9               |
| 1603      | 29                  | 9          | 170 X 95   | 52.8               |
| 1603      | 32                  | 11         | 170 X 95   | 52.8               |
| 1603      | 34                  | 13.5       | 200 X 120  | 57.7               |
| 1603      | 36                  | 15         | 200 X 120  | 57.7               |
| 1603      | 38                  | 17         | 250 X 150  | 76.7               |
| 1603      | 40                  | 19         | 250 X 150  | 76.7               |