


Wire Rope Sling - With Hook and Masterlink

Product information

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

... [Read more](#)

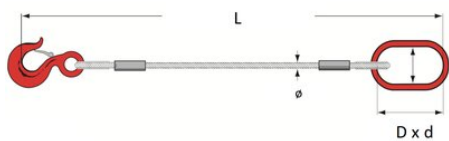

Marking: According to standard
Standard: EN 13414-1

Safety factor: 5:1

Wire Rope Sling - With Hook and Masterlink

Technical data

Part code	Rope diameter mm	WLL ton	Masterlink	Hook opening mm
1603	7	0.5	100 X 60	22.6
1603	8	0.65	100 X 60	22.6
1603	9	0.8	100 X 60	22.6
1603	10	1	100 X 60	22.6
1603	11	1.2	100 X 60	23.1
1603	12	1.4	100 X 60	23.1
1603	13	1.8	100 X 60	25.4
1603	14	2.12	120 X 70	27.7
1603	16	2.7	120 X 70	27.7
1603	18	3.4	135 X 75	34.5
1603	20	4.35	135 X 75	34.5
1603	22	5.2	135 X 75	40.9
1603	24	6.3	150 X 90	40.9
1603	26	7.2	150 X 90	40.9
1603	29	9	170 X 95	52.8
1603	32	11	170 X 95	52.8
1603	34	13.5	200 X 120	57.7
1603	36	15	200 X 120	57.7
1603	38	17	250 X 150	76.7
1603	40	19	250 X 150	76.7