


## Wire Rope Sling - Two Leg

### Product information

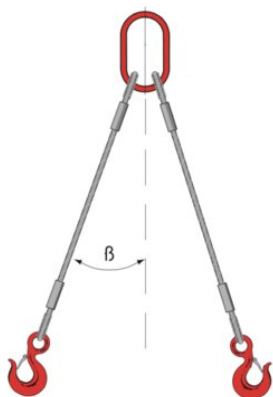

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

... [Read more](#)

**Marking:** According to standard  
**Standard:** EN 13414-1

**Safety factor:** 5:1

## Wire Rope Sling - Two Leg

### Technical data

Part code	Rope diameter mm	WLL 0-45° t	WLL 45-60° t	Masterlink	Hook opening mm
1605	7	0.7	0.5	100 X 60	22.6
1605	8	0.9	0.65	100 X 60	22.6
1605	10	1.4	1	100 X 60	22.6
1605	12	2	1.4	100 X 60	23.1
1605	14	3	2.12	120 X 70	27.7
1605	16	3.7	2.7	135 X 75	27.7
1605	18	4.7	3.4	135 X 75	34.5
1605	20	6	4.35	150 X 90	34.5
1605	22	7.2	5.2	150 X 90	40.9
1605	24	8.8	6.3	170 X 95	40.9
1605	26	10	7.2	170 X 95	40.9
1605	29	12.5	9	200 X 120	52.8
1605	32	15	11	200 X 120	52.8
1605	34	19	13.5	250 X 150	57.7
1605	36	21	15	250 X 150	57.7
1605	38	23.5	17	250 X 150	76.7
1605	40	26.5	19	250 X 150	76.7