


Wire Rope Sling - Two Leg

Product information

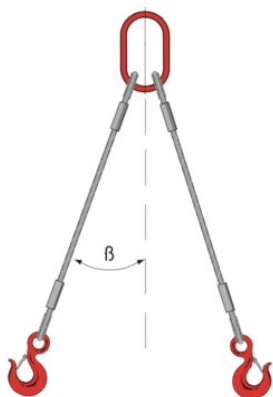

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

... [Read more](#)

Marking: According to standard
Standard: EN 13414-1

Safety factor: 5:1

Wire Rope Sling - Two Leg

Technical data

| Part code | Rope diameter mm | WLL 0-45° t | WLL 45-60° t | Masterlink | Hook opening mm |
|-----------|------------------|-------------|--------------|------------|-----------------|
| 1605 | 7 | 0.7 | 0.5 | 100 X 60 | 22.6 |
| 1605 | 8 | 0.9 | 0.65 | 100 X 60 | 22.6 |
| 1605 | 10 | 1.4 | 1 | 100 X 60 | 22.6 |
| 1605 | 12 | 2 | 1.4 | 100 X 60 | 23.1 |
| 1605 | 14 | 3 | 2.12 | 120 X 70 | 27.7 |
| 1605 | 16 | 3.7 | 2.7 | 135 X 75 | 27.7 |
| 1605 | 18 | 4.7 | 3.4 | 135 X 75 | 34.5 |
| 1605 | 20 | 6 | 4.35 | 150 X 90 | 34.5 |
| 1605 | 22 | 7.2 | 5.2 | 150 X 90 | 40.9 |
| 1605 | 24 | 8.8 | 6.3 | 170 X 95 | 40.9 |
| 1605 | 26 | 10 | 7.2 | 170 X 95 | 40.9 |
| 1605 | 29 | 12.5 | 9 | 200 X 120 | 52.8 |
| 1605 | 32 | 15 | 11 | 200 X 120 | 52.8 |
| 1605 | 34 | 19 | 13.5 | 250 X 150 | 57.7 |
| 1605 | 36 | 21 | 15 | 250 X 150 | 57.7 |
| 1605 | 38 | 23.5 | 17 | 250 X 150 | 76.7 |
| 1605 | 40 | 26.5 | 19 | 250 X 150 | 76.7 |