


## Wire Rope Sling - 3 and 4 legs

### Product information

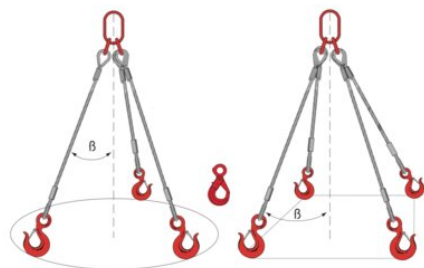

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

WLL table is valid only if the load is equally allocated on the legs

... [Read more](#)

**Marking:** According to standard  
**Standard:** EN 13414-1

**Safety factor:** 5:1

## Wire Rope Sling - 3 and 4 legs

### Technical data

Part code	Rope diameter mm	WLL ton	WLL 45-60° t	Masterlink	Hook opening mm
1609	7	1	0.75	120 x 70	22.6
1609	10	2.1	1.5	120 x 70	22.6
1609	12	3	2	135 x 75	23.1
1609	14	4.5	3	150 x 90	27.7
1609	16	5.6	4	150 x 90	27.7
1609	18	7	5	170 x 95	34.5
1609	20	9	6.5	200 x 120	34.5
1609	22	11	7.8	250 x 120	40.9
1609	24	13	9.4	250 x 150	40.9
1609	26	15	10.8	250 x 150	40.9
1609	29	19	13.5	250 x 150	52.8
1609	34	28	20	300 x 200	57.7
1609	36	31.5	22.5	300 x 200	57.7
1609	38	35.5	25.5	300 x 200	76.7
1609	40	40	28.5	300 x 200	76.7