


## Wire Rope Sling - With Eye

### Product information

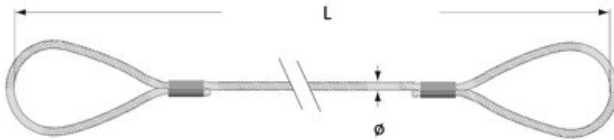

- Galvanized steel wire rope
- Proof load test at twice the nominal load.
- The inner length of a loop is equal to 20 times the diameter of the wire rope.
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).
- Steel wire rope composition and diameter can vary to ensure availability

**Marking:** According to standard

**Standard:** EN 13414-1

**Safety factor:** 5:1

Part code	WLL ton
1603	0.5
1603	0.65
1603	0.8
1603	1
1603	1.2
1603	1.4
1603	1.8
1603	2.12

1603	2.7
1603	3.4
1603	4.35
1603	5.2
1603	6.3
1603	7.2
1603	9
1603	11
1603	13.5
1603	15
1603	17
1603	19
1603	22.5
1603	25
1603	27
1603	29.5
1603	34.5
1603	43
1603	55
1603	65
1603	100
1603	125