


## Spiral Strand 1x19 Stainless

### Product information

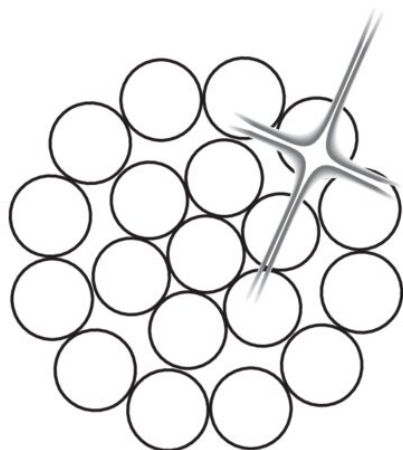

**Typical applications:** Wire rope for rigging, stays and controls.  
**Design:** Right- or left-handed.

... [Read more](#)

**Rope construction:** 1x19  
**Material:** AISI 316  
**Marking:** According to standard  
**Standard:** EN 12385-10  
*except material*

**Fill factor:** 0.76

Stay rope



## Spiral Strand 1x19 Stainless

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
108100101620078	1	1,570	Stainless	S	0.82	-	No-Lube	0.5
108100102620078	1	1,570	Stainless	Z	0.82	-	No-Lube	0.5
108100201620078	2	1,570	Stainless	S	3.3	-	No-Lube	2
108100202620078	2	1,570	Stainless	Z	3.3	-	No-Lube	2
108100301620078	3	1,570	Stainless	S	7.42	-	No-Lube	4.5
108100302620078	3	1,570	Stainless	Z	7.42	-	No-Lube	4.5
108100401620078	4	1,570	Stainless	S	13.2	-	No-Lube	7.9
108100402620078	4	1,570	Stainless	Z	13.2	-	No-Lube	7.9
108100501620078	5	1,570	Stainless	S	20.6	-	No-Lube	12.4
108100502620078	5	1,570	Stainless	Z	20.6	-	No-Lube	12.4
108100601620078	6	1,570	Stainless	S	29.7	-	No-Lube	17.8
108100602620078	6	1,570	Stainless	Z	29.7	-	No-Lube	17.8
108100701620078	7	1,570	Stainless	S	40.4	-	No-Lube	24.3
108100702620078	7	1,570	Stainless	Z	40.4	-	No-Lube	24.3
108100801620078	8	1,570	Stainless	S	52.8	-	No-Lube	31.7
108100802620078	8	1,570	Stainless	Z	52.8	-	No-Lube	31.7
108101001620078	10	1,570	Stainless	S	82.5	-	No-Lube	49.5
108101002620078	10	1,570	Stainless	Z	82.5	-	No-Lube	49.5
108101201620078	12	1,570	Stainless	S	119	-	No-Lube	71.3
108101202620078	12	1,570	Stainless	Z	119	-	No-Lube	71.3