
Lifting Solutions Group
Axel Johnson International

Spiral Strand 1x19 Stainless

Product information



Stay rope

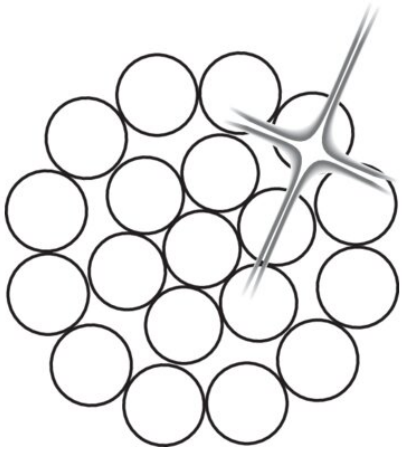

Typical applications: Wire rope for rigging, stays and controls.
Design: Right- or left-handed.

... *Read more*

Rope construction: 1x19
Material: AISI 316
Marking: According to standard
Standard: EN 12385-10
except material

Fill factor: 0.76

Traction Levage
marketingtl@traclev.com

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Spiral Strand 1x19 Stainless

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
108100101620078	1	1,570	Stainless	S	0.82	No-Lube	0.5
108100102620078	1	1,570	Stainless	Z	0.82	No-Lube	0.5
108100201620078	2	1,570	Stainless	S	3.3	No-Lube	2
108100202620078	2	1,570	Stainless	Z	3.3	No-Lube	2
108100301620078	3	1,570	Stainless	S	7.42	No-Lube	4.5
108100302620078	3	1,570	Stainless	Z	7.42	No-Lube	4.5
108100401620078	4	1,570	Stainless	S	13.2	No-Lube	7.9
108100402620078	4	1,570	Stainless	Z	13.2	No-Lube	7.9
108100501620078	5	1,570	Stainless	S	20.6	No-Lube	12.4
108100502620078	5	1,570	Stainless	Z	20.6	No-Lube	12.4
108100601620078	6	1,570	Stainless	S	29.7	No-Lube	17.8
108100602620078	6	1,570	Stainless	Z	29.7	No-Lube	17.8
108100701620078	7	1,570	Stainless	S	40.4	No-Lube	24.3
108100702620078	7	1,570	Stainless	Z	40.4	No-Lube	24.3
108100801620078	8	1,570	Stainless	S	52.8	No-Lube	31.7
108100802620078	8	1,570	Stainless	Z	52.8	No-Lube	31.7
108101001620078	10	1,570	Stainless	S	82.5	No-Lube	49.5
108101002620078	10	1,570	Stainless	Z	82.5	No-Lube	49.5
108101201620078	12	1,570	Stainless	S	119	No-Lube	71.3
108101202620078	12	1,570	Stainless	Z	119	No-Lube	71.3

Traction Levage
marketingtl@traclev.com

© November 2026 - All Rights Reserved