
Lifting Solutions Group
Axel Johnson International

Fall Arrest Harness POWERTEX HW PRO r-PET

Product information



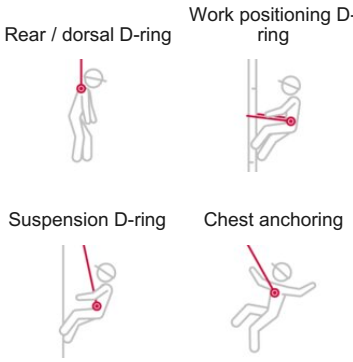

The Powertex HW PRO r-PET harness is an absolute powerhouse. It's a very versatile, modern, comfortable, and well-designed fall arrest harness with high-quality quick-release buckles for quick and safe use. The harness is type approved for fall arrest, work positioning, and rope access work. The unique shoulder strap design allows the shoulder straps to follow the user's movement.

On top of all that, the webbing is entirely made of recycled polyester (r-PET). This harness is also an excellent choice for customers who care about the environment and want to improve their sustainability performance. The webbing is water and dirt-repellent and prevents bacterial growth.

Because of this sustainability enhancement, this product is approved to be part of Lifting Solution Group's Aspire range™.

Features

- All HW harnesses are equipped with fall indicator.
- Made from recycled polyester (r-PET) webbing, the material is free from hazardous chemicals.
- Innovative webbing provides a 14 times reduction in bacterial growth when compared with standard webbing
- The harness has soft shoulder padding, waist belt padding, and leg paddings.
- Tool holder in the back of waist belt.
- The harness is approved for 140 kg use.
- RFID equipped (HF 13,56 MHz chip) for easy service, inspection, a ... *Read more*

Features: All webbing is made from recycled polyester (r-PET)
Material: Webbing is made from Recycled Polyester (r-PET), the material is free from hazardous chemicals. Steel buckles and aluminum D-rings
Marking: According to standard, CE-marked, Supplier symbol, Product identification, Max weight, Size, Pro- duction date, Serial number.
Temperature range: -35°C up to +50°C
Standard: EN 358, EN 361, EN 813

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Fall Arrest Harness POWERTEX HW PRO r-PET

Technical data

Part code	Size	Max user weight kg	Weight kg
820100042140	M	140	2.1
820100052140	L	140	2.1

Traction Levage
marketingtl@traclev.com
© November 2026 - All Rights Reserved