


Lifting Triangle

Product information

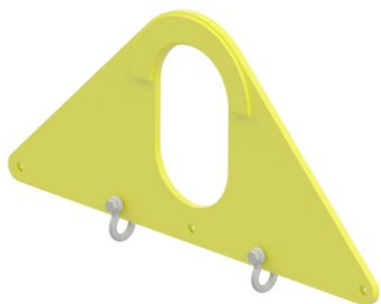

General: The lifting triangle has the same function as a short beam or a spreader. Given working load limits are valid for a maximum top sling angle of 90°. For top angles between 90°-120° working load limit shall be reduced by 30%. All lifting triangles are supplied with 2 shackles according to table. Working load limit in the centre shackle hole is equal to the working load limit of the shackle according to the table.

Design: Cut sheet metal. Wear plates and spacers for the shackles.

Proof: Batch proof 2 x WLL.

... [Read more](#)

Material: Plate of high-strength structural steel.

Marking: WLL and CE-marking.

Finish: Yellow painted.

Note: Other loads and dimensions are available on request.

Lifting Triangle

Blueprint

