


Gravel Plast 8 x 19 SLRP

Product information

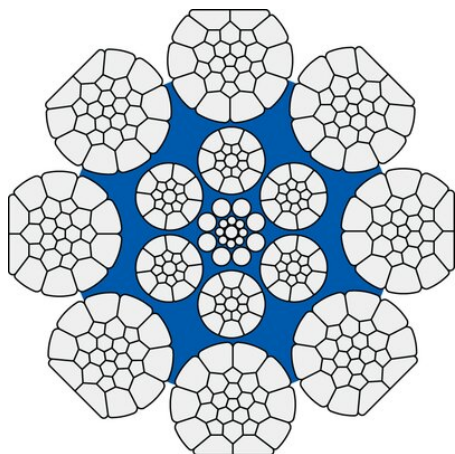

Applications :

- Made for working conditions in stone quarries
- Operating conditions affect the lifetime of the wire rope
- Extremely resistant to external abrasion
- Offers geometric stability, especially under fluctuating loads

... [Read more](#)

Rope construction: 8 x 19 SLRP

Marking: According to standard

Standard: EN 12385-4

Tolerance Ø: +1% to +4%

Gravel Plast 8 x 19 SLRP

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
103101604300419	16	2,160	Galvanized	sZ	258	147	SupplierStandard	1.32
103101603300419	16	2,160	Galvanized	zS	258	147	SupplierStandard	1.32
103101804300419	18	2,160	Galvanized	sZ	327	186	SupplierStandard	1.67
103101803300419	18	2,160	Galvanized	zS	327	186	SupplierStandard	1.67
103101904300419	19	2,160	Galvanized	sZ	363	206	SupplierStandard	1.85
103101903300419	19	2,160	Galvanized	zS	363	206	SupplierStandard	1.85
103102004300419	20	2,160	Galvanized	sZ	402	229	SupplierStandard	2.06
103102003300419	20	2,160	Galvanized	zS	402	229	SupplierStandard	2.06
103102204300419	22	2,160	Galvanized	sZ	487	277	SupplierStandard	2.49
103102203300419	22	2,160	Galvanized	zS	487	277	SupplierStandard	2.49
103102404300419	24	2,160	Galvanized	sZ	579	329	SupplierStandard	2.96
103102403300419	24	2,160	Galvanized	zS	579	329	SupplierStandard	2.96
103102504300419	25	2,160	Galvanized	sZ	630	358	SupplierStandard	3.22
103102503300419	25	2,160	Galvanized	zS	630	358	SupplierStandard	3.22
103102544300419	25.4	2,160	Galvanized	sZ	653	369	SupplierStandard	3.3
103102543300419	25.4	2,160	Galvanized	zS	653	369	SupplierStandard	3.3
103102604300419	26	2,160	Galvanized	sZ	680	386	SupplierStandard	3.48
103102603300419	26	2,160	Galvanized	zS	680	386	SupplierStandard	3.48
103102804300419	28	2,160	Galvanized	sZ	788	4.48	SupplierStandard	4.03
103102803300419	28	2,160	Galvanized	zS	788	4.48	SupplierStandard	4.03
103102864300419	28.6	2,160	Galvanized	sZ	823	467	SupplierStandard	4.21
103102863300419	28.6	2,160	Galvanized	zS	823	467	SupplierStandard	4.21
103103004300419	30	2,160	Galvanized	sZ	906	515	SupplierStandard	4.63
103103003300419	30	2,160	Galvanized	zS	906	515	SupplierStandard	4.63
103103204300419	32	2,160	Galvanized	sZ	1,030	585	SupplierStandard	5.27
103103203300419	32	2,160	Galvanized	zS	1,030	585	SupplierStandard	5.27
103103404300419	34	2,160	Galvanized	sZ	1,164	661	SupplierStandard	5.95
103103403300419	34	2,160	Galvanized	zS	1,164	661	SupplierStandard	5.95
103103504300419	35	2,160	Galvanized	sZ	1,227	697	SupplierStandard	6.27
103103503300419	35	2,160	Galvanized	zS	1,227	697	SupplierStandard	6.27
103103604300419	36	2,160	Galvanized	sZ	1,304	741	SupplierStandard	6.67

Gravel Plast 8 x 19 SLRP

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
103103603300419	36	2,160	Galvanized	zS	1,304	741	SupplierStandard	6.67
103103804300419	38	2,160	Galvanized	sZ	1,454	826	SupplierStandard	7.44
103103803300419	38	2,160	Galvanized	zS	1,454	826	SupplierStandard	7.44
103104004300419	40	2,160	Galvanized	sZ	1,611	915	SupplierStandard	8.24
103104003300419	40	2,160	Galvanized	zS	1,611	915	SupplierStandard	8.24
103104204300419	42	2,160	Galvanized	sZ	1,777	1,010	SupplierStandard	9.09
103104203300419	42	2,160	Galvanized	zS	1,777	1,010	SupplierStandard	9.09
103104404300419	44	2,160	Galvanized	sZ	1,851	1,052	SupplierStandard	9.46
103104403300419	44	2,160	Galvanized	zS	1,851	1,052	SupplierStandard	9.46