


## DRAKO 250T

### Product information

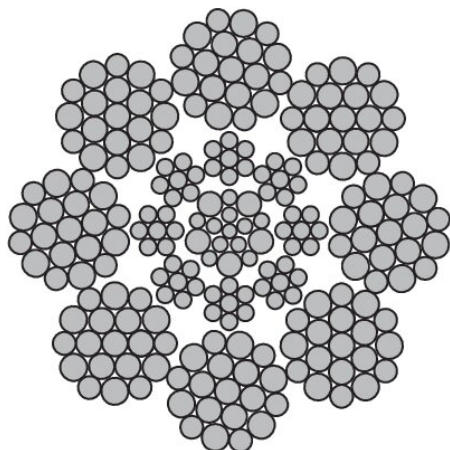

- 8-strand steel wire rope with steel core
- very low D/d ratio of up to 8 mm in diameter
- required drive torque is greatly reduced
- cost saving drives possible
- space saving in indirect hydraulic elevators thanks to very small pulley diameters [... Read more](#)


**Features:** This rope is successfully used in diameters up to 13mm as a governor rope.

**Rope construction:** 8x19W-IWRC

**Marking:** According to standard

**Standard:** EN 12385-5

Elevator



## DRAKO 250T

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
106100604050269	6	1,770	Bright	sZ	26.8	17.1	SupplierStandard	16.4
106100654050269	6.5	1,770	Bright	sZ	31.5	20.7	SupplierStandard	17.9
106100804020269	8	1,570	Bright	sZ	43.3	30.9	SupplierStandard	27.3
106100904020269	9	1,570	Bright	sZ	54.8	38.6	SupplierStandard	34.3
106101004020269	10	1,570	Bright	sZ	67.7	49.2	SupplierStandard	42.3
106101003020269	10	1,570	Bright	zS	67.7	49.2	SupplierStandard	42.3
106101004220269	10	1,570	Galvanized	sZ	67.7	49.2	SupplierStandard	42.3
106101004050269	10	1,770	Bright	sZ	72.7	49.2	SupplierStandard	42.3
106101104020269	11	1,570	Bright	sZ	81.9	60.1	SupplierStandard	51.2
106101204020269	12	1,570	Bright	sZ	97.4	69.6	SupplierStandard	61
106101304020269	13	1,570	Bright	sZ	114	83.9	SupplierStandard	71.5
106101404020269	14	1,570	Bright	sZ	133	96	SupplierStandard	82.9