Lifting Solutions Group
Axel Johnson International

Weld-on Point 8-057

Product information

The eyes can be loaded with working load limit in all directions, pivots through 180°. Load rated parts are 100% magnaflux crack detected. Individual forged parts are traceable to Test Certification.
Proof tested to 2.5 times the WLL, fatigue rated to 1.5 times the WLL.
A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibration.

Material: Manufactured from forged alloy steel, quenched and tempered.
Marking: According to standard, CE-marked, WLL, size, steel quality, manufacturer ID and traceability.
Standard: EN 1677-1

Part Code	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	W mm	HV mm	a mm	Weight kg	Delivery time
172654	1	83	41	48	14	14	86	27	58	109	50	5	3	0.5	15
172655	3	98	48	58	17	17	85	31	54	114	58	6	3	0.9	15
172656	5	120	63	66	22	22	118	41	77	157	64	7	3	1.3	15
172657	8	121	73	68	26	26	122	53	69	169	60	10	4	2.6	15
172658	10	146	73	82	20	30	141	53	88	191	75	10	4	2.8	15

Technical data

Kind of attachment										
Number of legs	**1**	**2**	**1**	**2**	**2**	**2**	**2**	**3-4**	**3-4**	**3-4**
Load direction	**0°**	**0°**	**90°**	**90°**	**0-45°**	**45-60°**	**Unsymm.**	**0-45°**	**45-60°**	**Unsymm**
8-057-1T	1	2	1	2	1,4	1	1	2,1	1,5	1
8-057-3T	3	6	3	6	4,2	3	3	6,3	4,5	3
8-057-5T	5	10	5	10	7	5	5	10,5	7,5	5
8-057-8T	8	16	8	16	11,2	8	8	16,8	12	8
8-057-10T	10	20	10	20	14	10	10	21	15	10
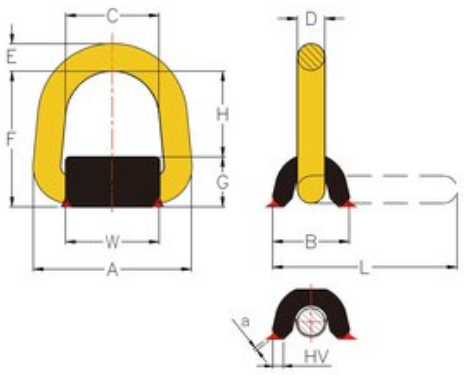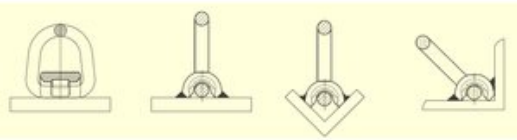
Blueprint