

## Universal Swivel VIP RUD UW-PP

---

### Product information



- With a ball bearing which enables swiveling under load.
- Patented clevis system facilitating a universal connection
- Can be loaded in all directions with the shortest combination possibilities.

Assemble only with approved RUD - VIP - chain and ring components:

- VIP-Cobra eye hook VCÖH
- Oval-Link PP-B for PowerPoint

The VIP-Chain connection is fool-proof. When assembling, especially with the ring components, pay attention to the correct WLL! Not suitable for permanent use and swiveling under full load. Connecting bolt and tensioning sleeve are pre-assembled. The DGUV-rule 109-017 stipulates that slings never be used while in a twisted condition. This requirement is automatically met by the UW-PP because of the integrated ball bearing.

[... Read more](#)

---


**Temperature range:** -40°C up to 200°C

**Safety factor:** 4:1

**Grade:** 10

## Universal Swivel VIP RUD UW-PP

### Blueprint

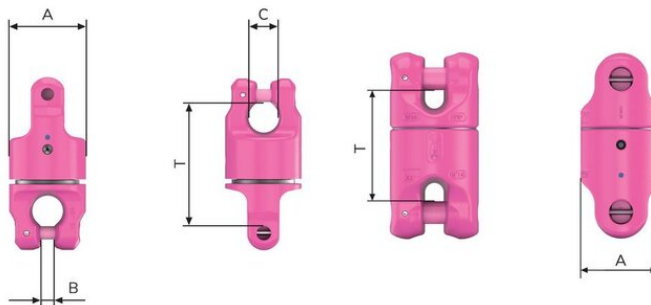

### Technical data

Part code	Code	WLL ton	A mm	B mm	C mm	T mm	Weight kg
422500060560	UW-PP-4	0.63	32	4.8	13	56	0.2
422500150560	UW-PP-6	1.5	38	7	16	68	0.42
422500250560	UW-PP-8	2.5	52	9.1	20	88	1
422500400560	UW-PP-10	4	66	11	26	106	1.91
422500670560	UW-PP-13	6.7	80	14.5	30	131	3.64
422501000560	UW-PP-16	10	86	17.6	37	141	4.87
422503150560	VUW-28	31.5	148	-	-	183	27.3