


GN HK2S Eye Hook ROV

Product information

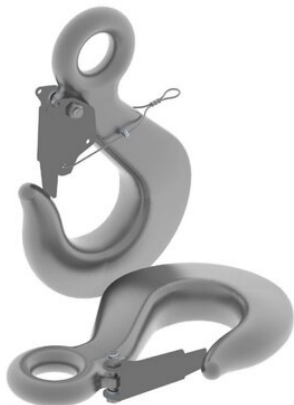

Hooks are used in towing, mooring and lifting systems as a connection between slings, rope, wire rope and chain.

- ROV type hooks are modified for easy ROV handling during hook-up or release.
- Eye hooks HK2 are generally used for lifting systems.
- The HK2 modified ROV type can be used subsea.

[... Read more](#)

Material: Alloy Steel

Marking: According to standard

Temperature range: -40°C up to 200°C

Finish: Painted


Standard: DIN 7540, EN 10204

Safety factor: 4:1

Grade: 8

GN HK2S Eye Hook ROV

Blueprint



Technical data

Part code	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	P mm	Weight kg
401300800250	8	40	62	54	46	174	20	32	20	35	-	2.9
401301250250	12.5	52	79	69	60	219	26	40	26	45	-	6.1
401301600250	16	59	88	75	64	246	28	46	28	50	-	8.1
401302000250	20	64	98	87	76	277	34	51	34	56	-	12
401302800250	28	74	111	99	85	313	38	59	38	63	-	17
401303100250	31	82	125	109	94	349	43	65	43	70	-	25
401304000250	40	99	139	121	106	388	47	72	47	80	-	34
401305000250	50	110	157	139	120	442	54	84	54	89	-	49
401306300250	63	121	175	155	134	494	60	90	60	99	-	67
401308000250	80	132	197	172	149	610	67	102	67	110	-	99
401310000250	100	154	225	200	177	650	79	116	79	125	-	148
401315000250	150	181	250	230	203	765	91	130	91	160	-	246
401320000250	200	208	275	265	240	850	107	150	107	180	-	372
401325000250	250	233	310	296	275	928	126	170	126	200	9.5	531
401330000250	300	264	350	337	317	1,052	147	190	147	220	12	779
401340000250	400	303	400	388	352	1,195	174	210	174	240	17	1,144
401350000250	500	370	450	410	390	1,360	200	215	200	320	17	1,840