



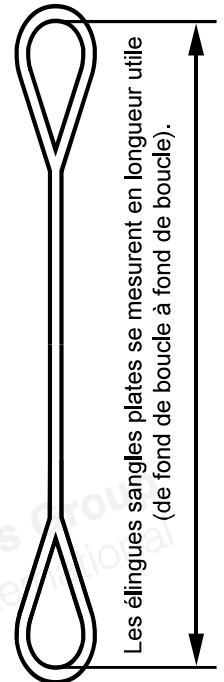


Facteurs de mode : élingue sangle plate

	CMU en kg	Largeur en mm	Charge Maximale d'Utilisation				
			100 %	200 %	140% de 0° à 45°	100 % de 45° à 65°	80 %
							
LILAS	1 000	30	1 000	2 000	1 400	1 000	800
OLIVE	1 500	50	1 500	3 000	2 100	1 500	1 200
VERT	2 000	60	2 000	4 000	2 800	2 000	1 600
BLANC	2 500	75	2 500	5 000	3 500	2 500	2 000
JAUNE	3 000	90	3 000	6 000	4 200	3 000	2 400
GRIS	4 000	120	4 000	8 000	5 600	4 000	3 200
ROUGE	5 000	150	5 000	10 000	7 000	5 000	4 000
MARRON	6 000	180	6 000	12 000	8 400	6 000	4 800
BLEU	8 000	240	8 000	16 000	11 200	8 000	6 400
ORANGE	10 000	300	10 000	20 000	14 000	10 000	8 000
ORANGE	15 000	240	15 000	30 000	21 000	15 000	12 000
ORANGE	20 000	300	20 000	40 000	28 000	20 000	16 000



Les CMU sont conformes aux conditions d'utilisation précisées dans la norme EN 1492-1.



Retrouvez l'ensemble de nos élingues textile sur notre site internet www.traclev.com

