



Facteurs de mode : élingue ronde

		Charge Maximale d'Utilisation				
		100 %	200 %	140% de 0° à 45°	100 % de 45° à 65°	80 %
						
	CMU en kg					
LILAS	1 000	1 000	2 000	1 400	1 000	800
VERT	2 000	2 000	4 000	2 800	2 000	1 600
JAUNE	3 000	3 000	6 000	4 200	3 000	2 400
GRIS	4 000	4 000	8 000	5 600	4 000	3 200
ROUGE	5 000	5 000	10 000	7 000	5 000	4 000
MARRON	6 000	6 000	12 000	8 400	6 000	4 800
BLEU	8 000	8 000	16 000	11 200	8 000	6 400
ORANGE	10 000	10 000	20 000	14 000	10 000	8 000
ORANGE	15 000	15 000	30 000	21 000	15 000	12 000
ORANGE	25 000	25 000	50 000	35 000	25 000	20 000
ORANGE	30 000	30 000	60 000	42 000	30 000	24 000
ORANGE	40 000	40 000	80 000	56 000	40 000	32 000



Les CMU sont conformes aux conditions d'utilisation précisées dans la norme EN 1492-2.

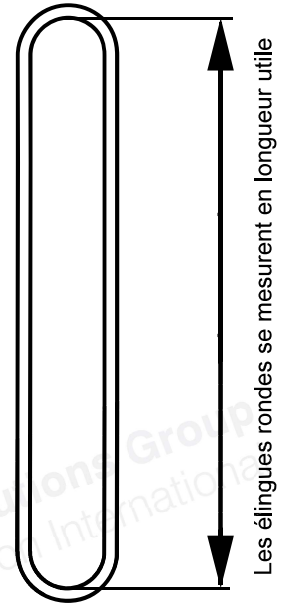

Retrouvez l'ensemble de nos élingues textile
sur notre site internet www.traclev.com

