Lifting Solutions Group
Axel Johnson International

Pipe Lifting Clamp TPH/TPH-HD

Product information



Heavy duty clamp with high pressure resistant plastic for horizontal pipe lifting.
Clamp for horizontal lifting and transporting of steel and concrete pipes without damaging the product.
Model THP: Standard clamp
Model THP-HD: special for extreme heavy duty lifting situations

Features:

- TPH Jaw is covered with a special high quality pressure resistant plastic.
- TPH-HD Jaw is covered with special high quality extreme high pressure resistant plastic.
- Maintenance-friendly clamps, plastic pressure resistant cover is easy to change.
- TPH-HD has special handle for easy handling.
- Compact design and high lifting capacity.
- Lightweight design for easy handling.
- Tough quality heavy duty body.

... *Read more*


Marking: According to standard, CE-marked, Type, serial number, WLL, Jaw opening
Temperature range: TPH: - 40°C to + 50°C. / TPH-HD - 30°C to + 80°C.
Standard: EN 13155
Note: Must always be used in pairs

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Pipe Lifting Clamp TPH/TPH-HD

Blueprint

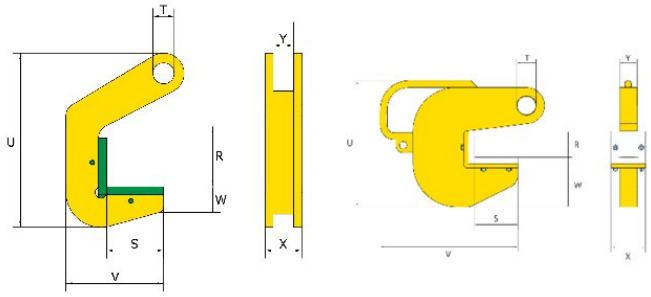

Technical data

Part code	Code	WLL ton	Jaw width mm	V mm	S mm	W mm	U mm	T mm	X mm	Y mm	Weight kg
502100150400740	1.5 TPH	1.5	40	120	70	50	185	16	41	25	2
502100300400740	3 TPH	3	40	120	70	50	185	16	41	25	2
502100400500740	4 TPH	4	50	140	70	58	204	26	41	25	3
502100500600740	5 TPH-HD	5	60	309	100	85	232	26	80	20	6.7
502100600500740	6 TPH	6	50	140	70	58	204	26	41	25	3
502100800700740	8 TPH	8	70	140	70	58	224	26	45	25	3.4
502101000700740	10TPH	10	70	140	70	58	224	26	85	45	5
502101000600740	10 TPH-HD	10	60	319	100	85	236	36	80	30	9.7
502101200700740	12TPH	12	70	140	70	58	224	26	85	45	7
502101500700740	15TPH	15	70	155	70	76	250	26	100	60	9
502102000700740	20TPH	20	70	155	70	76	250	26	100	60	9
502102000600740	20 TPH-HD	20	60	362	100	105	285	51	80	35	14
502103000600740	30 TPH-HD	30	60	387	100	115	310	58	80	40	19
502106000600740	60 TPH-HD	60	60	418	100	115	350	85	80	60	28.5

Traction Levage
marketingtl@traclev.com

© November 2026 - All Rights Reserved