




Steel Wire Rope 6x36WS-IWRC

Product information

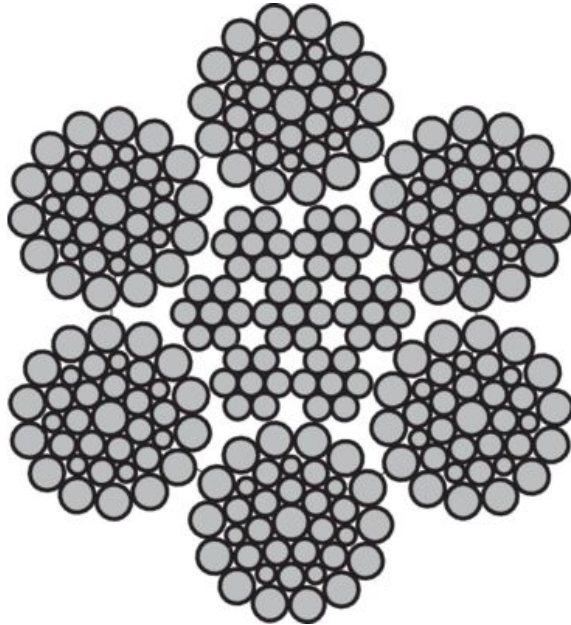

ISO 4309 Rope Category No: All Diameters **RCN.09**

Rope construction: 6x36WS-IWRC.

Marking: According to standard

Standard: EN 12385-4

Fill factor: 0.59

RCN: 09

Slings




Winch rope



Stay rope



Overhead cranes



Tower crane



Container crane



Mobile port crane



Offshore crane



Loading crane



Crawler crane



Piling crane



Part Code	Rope Diameter, mm	Min. Breaking force kN. 1960 N/mm ²	Weight kg/100m
01.G10---080G	8	44.7	25.5
01.G10---090G	9	56.5	32.2
01.G10---100G	10	69.8	39.8
01.G10---110G	11	84.4	48.2
01.G10---120G	12	100	57.3
01.G10---130G	13	118	67.3
01.G10---140G	14	137	78
01.G10---160G	16	179	102
01.G10---180G	18	226	129
01.G10---190G	19	252	144
01.G10---200G	20	279	159
01.G10---220G	22	338	193
01.G10---240G	24	402	229
01.G10---260G	26	472	269
01.G10---280G	28	547	312
01.G10---300G	30	628	358
01.G10---320G	32	715	408

01.G10---340G	34	807	460
01.G10---360G	36	904	516
01.G10---380G	38	1010	575
01.G10---400G	40	1120	637
01.G10---420G	42	1230	702
01.G10---440G	44	1350	771
01.G10---460G	46	1480	842
01.G10---480G	48	1610	917
01.G10---500G	50	1740	995
01.G10---520G	52	1890	1,080
01.G10---540G	54	2030	1,160
01.G10---560G	56	2190	1,250
01.G10---580G	58	2350	1,340
01.G10---600G	60	2510	1,430
01.G10---640G	64	2860	1,630
01.G10---680G	68	3230	1,840
01.G10---720G	72	3620	2,060
01.G10---760G	76	4030	2,300